



## ***Stretch DisplayPort™***



### *User Manual M1-5000*

## Manual Contents

---

Manual Contents	1-0
Welcome!, Product Description	1-1
System Requirements for Setup	1-2
Installation	1-3
Troubleshooting, Maintenance, Technical Support	1-5
Product Specifications	1-6
Warranty Information	1-7
Certifications	1-8

### Pictorials

Figure 1 – Optical DisplayPort Extension Cable, M1-5000	1-1
Figure 2 – TX Module of M1-5000 Cable	1-3
Figure 3 – TX Module of M1-5000 Cable with adapter	1-3
Figure 4 – RX Module of M1-5000 Cable	1-4
Figure 5 – Whole Connection of M1-5000 Cable	1-5

## Welcome!

Congratulations on your purchase of the **Stretch DisplayPort™ M1-5000** Optical DisplayPort Extension Cable. This manual contains information that will assist you in installing and operating the product.

## Product Description

### Shipping Group

- ❑ **M1-5000 Optical DisplayPort Cable:** One (1) unit, length as you request.
- ❑ **DisplayPort Copper Cable:** Two (2) units, 0.5M.
- ❑ **+5V AC/DC power adapter :** One (1) unit
- ❑ **User Manual**

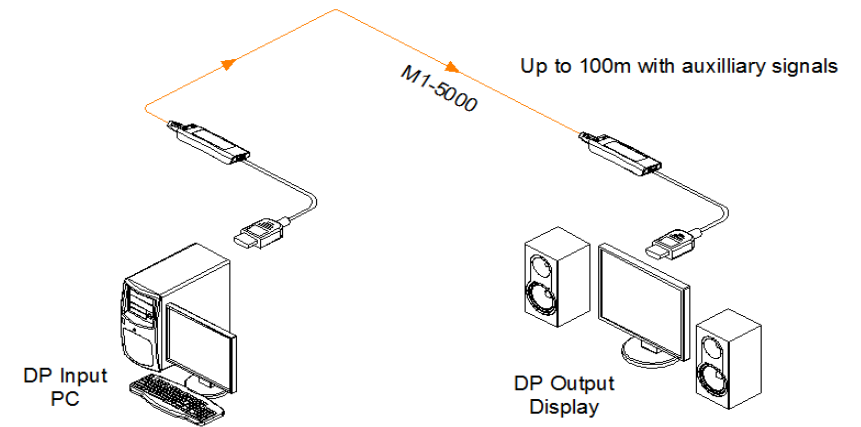


Figure 1 – Optical DP extension Cable, M1-5000

## System Requirements for Setup

- **Hardware requirements**
  - You must have a DisplayPort multimedia system (PC, DVD, AV Receiver, STB, Displaying Monitor etc.) or graphic cards. It should support the maximum graphic resolution feature of Monitors to be connected.
  - No special requirements of memory size, CPU speed and chipsets, if you've already properly installed your DP systems or DP graphic cards.
- **Software requirements**
  - No special restrictions, if you've already properly installed your DP systems.
- **AC/DC Power Adapter Technical Advisory**

**The M1-5000 is designed to use only +5V external power. (Power may be only plugged on one side of the module. The power is supplied to other side through a copper wire in the hybrid cable.)**

## Installation

**Important: Please use the installation procedure below. Improper, or no operation may result if the start-up sequence is not correctly followed.**

### Step 1

Carefully unpack the contents of the shipping group.

### Step 2

Directly plug the DP plug of the TX side of M1-5000 into the DP receptacle of DP source (PC or Graphic Source). Do **NOT** use any intermediate cable or adapter between them. It may deteriorate the signal transmission performance.




Figure 2 – TX Module of M1-5000 Cable

### Step 3

As shown in Figure 3, plug the +5V power adaptor in the shipping group to the TX module (or RX Module). Connection with 5V power adaptor to M1-5000 Cable is indispensable procedure for working.




Figure 3 – TX Module of M1-5000 Cable with power adaptor

#### Step 4

Plug the DP plug of the RX side of M1-5000 into the DP receptacle of a Display. Do **NOT** use any intermediate cable or adapter between them. It may deteriorate the signal transmission performance.




Figure 4 – RX Module of M1-5000 Cable

#### Step 5

Turn the power of the device of a DP source and a Monitor.

**Note: M1-5000** must be connected by +5V power adaptor. When power is supplied to TX module, it is supplied to the RX module over a copper wire in the hybrid cable.

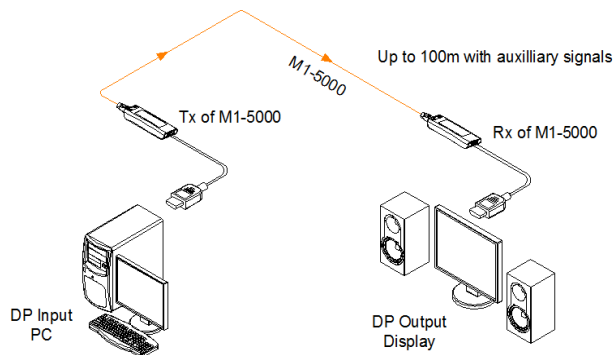


Figure 5 – Whole Connection of M1-5000 Cable

#### Step 7

If the system does not work properly, go to page 1-5, trouble shooting.

## Troubleshooting

### ***The display shows black screen.***

Ensure that all AC and DC plugs and jacks used by external power supplies (both Opticis and others) are firmly connected. Ensure that the DP ports are firmly plugged into the DP source/PC and Monitor/TV. Ensure that the TX and RX module parts are plugged correctly to the DP source/PC and Monitor, respectively.

Check if the DP source/PC and Monitor are powered on and properly booted. Reset the system by de-plugging and re-plugging the TX DP port or RX DP port, or by de-plugging and re-plugging the power cord plugs of TX module. Re-boot up the system while connecting the optical DP cable system.

### ***Screen is distorted or displays noises.***

Ensure that the connections of both plugs are firm while disconnecting and reconnecting the optical DP cables or DC power adapters.

## Maintenance

No special maintenance is required for the optical DP cables and power supplies. Ensure that the cables and power modules are stored or used in a benign environment free from liquid or dirt contamination.

There are no user serviceable parts. Refer all service and repair issues to Opticis.

## Technical Support and Service

For commercial or general product support, contact your reseller. For technical service, contact us by email [info@vigillink.com](mailto:info@vigillink.com) or visit our website at [www.vigillink.com](http://www.vigillink.com)

## Product Specifications

- **Compliance with DisplayPort standard:** support DP 1.1a with 36-bit color depth and DVI 1.0 (DDC2B), fully implemented by fiber-optic communication.
- **Extension limit:** 100m (328feet) for WQXGA (2560x1600) at 60 Hz refresh rate.
- **Graphic Transmission Bandwidth:** Support 2.7Gbps per one lane.
- **Hybrid Fiber-optic Cable:** Flame retardant PVC employing 4 fiber strands and 5 shielded copper wires.
- Tensile load: 180N
  - Minimum bend radius: 15.4cm
  - Outer diameter of cable: 7.2mm
- **Mechanical specifications of TX and RX module parts**
  - **Dimensions (WDH):** 35 x 99.4 x 16mm
  - **Clamping strength to cable:** 14kg<sub>f</sub>
- **Environmental Specifications**
  - Operating temperature: 0°C to 50°C
  - Storage temperature: - 30°C to 70°C
  - Humidity: 10% to 85%

## AC/DC Power Adapter

- **Power Input:** AC 100-240V, 50/60Hz 0.1A
- **Power Output:** +5 V, 1.0A SMPS DC-power Adapter
- **Cord DC Jack:** Core is 5V and outer is GND.

## Warranty Information

### 1 (One) Year Warranty

Opticis warrants this optical DP extension cable to be free from defects in workmanship and materials, under normal use and service, for a period of one (1) year from the date of purchase from Opticis or its authorized resellers.

If a product does not work as warranted during the applicable warranty period, Opticis shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product.

All products that are replaced will become the property of Opticis.

Replacement products may be new or reconditioned.

Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer.

Opticis shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to Opticis for repair under warranty or not.

### Warranty Limitation and Exclusion

Opticis shall have no further obligation under the foregoing limited warranty if the product has been damaged due to abuse, misuse, neglect, accident, unusual physical or electrical stress, unauthorized modifications, tampering, alterations, or service other than by Opticis or its authorized agents, causes other than from ordinary use or failure to properly use the Product in the application for which said Product is intended.

### Dispose of Old Electrical & Electronic Equipment

(Applicable in the European Union and other European countries with separate systems)



This symbol on the product or on its packaging indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences for the environment and human health, which could otherwise be caused by inappropriate waste handling of this product.

The recycling of materials will help to conserve natural resources. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

## Certifications

CE / FCC, Class 1 Laser Eye Safety

### Certification of Eye Safety

This laser product is inside implemented by using 1310, 1550nm LD Transceivers, manufactured by Opticis Co., Ltd., which are all certified by CDRH/FDA referred as classified in Laser Class 1 (IEC60825-1).



Caution – Use of controls or adjustments or performances of procedures other than those specified herein may result in hazardous radiation exposure.

## Optolinks

### Headquarters

46 Corporate Park #130  
Irvine, CA 92606  
949-701-4742  
[info@vigillink.com](mailto:info@vigillink.com)

---

For order support, please contact your Distributor or Reseller.

For technical support, check with the our website [www.vigillink.com](http://www.vigillink.com)  
or contact [info@vigillink.com](mailto:info@vigillink.com)